

Part number:

HYDROMA

HYDRAULICKÉ SYSTÉMY

**HIDROMA
SYSTEMS**

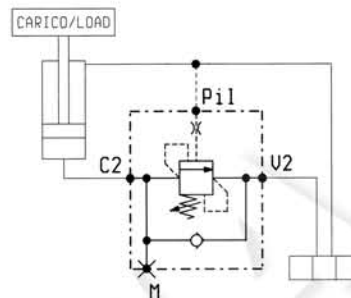
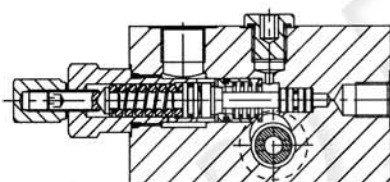
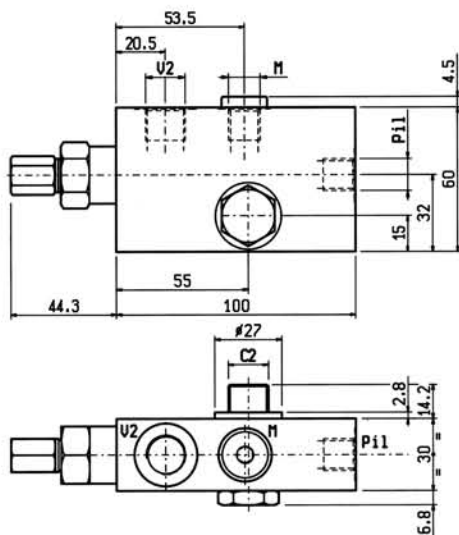
UKŁADY HYDRAULICZNE

HYDROMA

ГИДРАВЛИЧЕСКИЕ СИСТЕМЫ

BILANCIAMENTO, SEMPLICE EFFETTO, SERIE "30",
FLANGIABILI

PILOT ASSISTED, FLANGEABLE, SERIES "30" OVERCENTRE

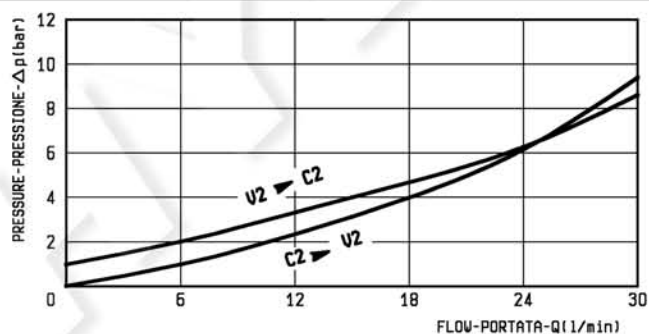
VBSO-SE-30-FCV
05.47.47 - X - Y - Z

DATI TECNICI / TECHNICAL DATA

Pressione max.
Max. pressure 350 bar

Portata max.
Flow max. 30 l/min

Taratura della valvola: almeno 1.3 volte superiore
alla pressione indotta dal carico
Pressure setting: at least 1.3 times the load
induced pressure

Cappello per piombatura Codice/Ordering code
Sealing Cap 03.05.01.003

Peso
Weight 0.7 kg

**X RAPPORTO DI PILOTAGGIO
PILOT RATIO**
03 4.2 : 1

Z	MOLLE / SPRINGS				
	Campo taratura min - max bar Adj. press. range bar	Incremento press. bar / giro vite Press. increase bar / turn	Taratura standard bar (Q = 5 l/min) Std. setting bar (made at 5 l/min)	Cod. ordinazione Ordering code	Colore Colour
35	100-350	138	350	03.51.01.171	giallo yellow

Y	ATTACCHI / PORT SIZE	
	V2-C2	Pil - M
02	G 3/8	G 1/4