

Part number:

006-10460**HYDROMA**

HYDRAULICKÉ SYSTÉMY

**HIDROMA
SISTEMS**

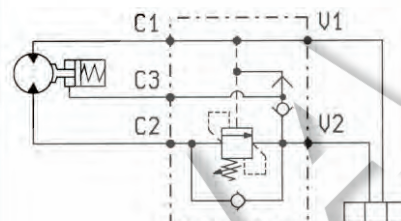
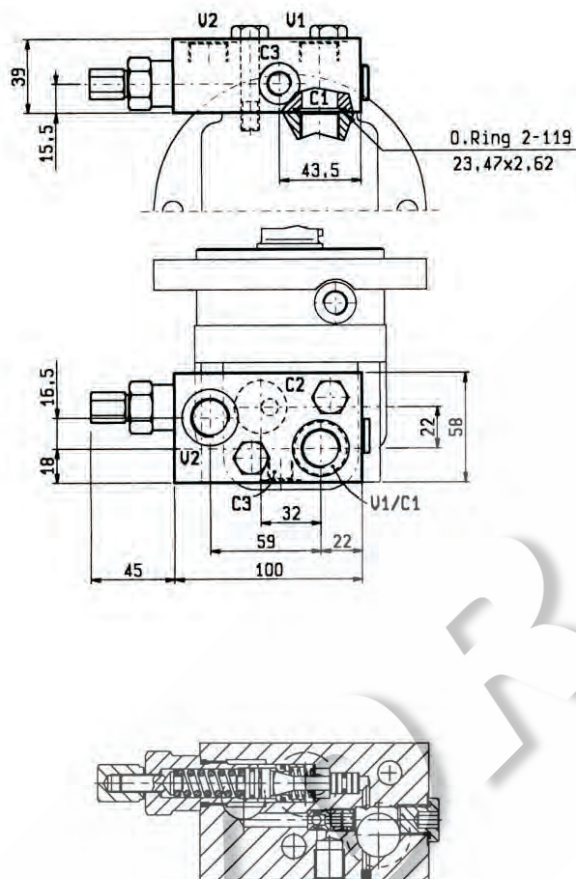
UKŁADY HYDRAULICZNE

HYDROMA

ГИДРАВЛИЧЕСКИЕ СИСТЕМЫ

BILANCIAMENTO, SEMPLICE EFFETTO, SERIE "30", FLANGIABILI,
PER ARGANI

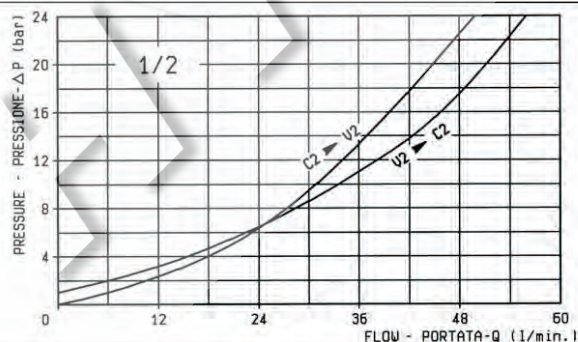
PILOT ASSISTED, SERIES "30", FLANGEABLE, OVERCENTRE FOR WINCHES

VBSO-SE-30-FA**05.45.71 - X - Y - Z****DATI TECNICI / TECHNICAL DATA**Pressione max. 350 bar
Max. pressurePortata max. 60 l/min
Flow max.Peso 0.7 kg
Weight

Taratura della valvola: almeno 1.3 volte superiore alla pressione indotta dal carico
Pressure setting: at least 1.3 times the load induced pressure

Flangiabili a motori Danfoss serie OMS, OMSW e OMSS.
Flangeable upon Danfoss motors series OMS, OMSW and OMSS.

Campione di una gamma di valvole progettate per la flangiatura diretta su motori idraulici. Per applicazioni diverse da questo esempio contattare OIL CONTROL.
Sample of a family of valves designed for direct flange mounting onto hydraulic motors. For applications different from this example, please consult OIL CONTROL.

**X RAPPORTO DI PILOTAGGIO
PILOT RATIO****03** 4.2 : 1**MOLLE / SPRINGS**

Z	Campo taratura min - max bar	Incremento press. bar / giro vite	Taratura standard bar (Q = 5 l/min)	Cod. ordinazione Ordering code	Colore Colour
	Adj. press. range bar	Press. increase bar / turn	Std. setting bar (Q = 5 l/min)		
35	100-350	138	350	03.51.01.171	giallo yellow

Y ATTACCHI / PORT SIZE

Y	V1-V2	C3
03	G 1/2	G 1/4