FPA-MDM

PRESSURE FILTERS

MATERIALS

Housing: Anodized aluminium alloy
Bypass valve: Brass
Seals: NBR Nitrile (FKM Fluoroelastomer - on request)
Indicator housing: Brass

PRESSURE

Max working: 11 MPa (110 bar)
Collapse, differential for the filter element (ISO 2941):
8 MPa (80 bar)

BYPASS VALVE

Setting: 600 kPa (6 bar) ± 10%

WORKING TEMPERATURE


From -25° to +110° C

COMPATIBILITY (ISO 2943)

Full with fluids: HH-HL-HM-HV-HTG
(according to ISO 6743/4)
For fluids different than the above mentioned,
please contact our Customer Service.



HYDRAULIC DIAGRAM



Is this datasheet the latest release? Please check on our website.

FPA
PRESSURE FILTERS

ORDERING AND OPTION CHART

F	P	A	COMPLETE FILTER FAMILY		
			SIZE & LENGTH	11	12
			PORT TYPE		
			B = BSP thread	B	B
			N = NPT thread *	N	N
			S = SAE thread *	S	S
			PORT SIZE		
			04 = 1/2" (N04 not available)	04	04
			BYPASS VALVE		
			W = without	W	W
			C = 600 kPa (6 bar)	C	C
			SEALS		
			N = NBR Nitrile	N	N
			F = FKM Fluoroelastomer	F	F
			FILTER MEDIA		
			FA = fibreglass 5 µm(c) β>1.000	FA	FA
			FB = fibreglass 7 µm(c) β>1.000	FB	FB
			FC = fibreglass 12 µm(c) β>1.000	FC	FC
			FS = fibreglass 16 µm(c) β>1.000	FS	FS
			FD = fibreglass 21 µm(c) β>1.000	FD	FD
			FE = fibreglass 30 µm(c) β>1.000	FE	FE
			CLOGGING INDICATOR**		
			03 = port, plugged	03	03
			5E = visual differential 500 kPa (5 bar)	5E	5E
			6E = electrical differential 500 kPa (5 bar)	6E	6E
			7E = indicator 6E with LED	7E	7E
			T2 = elect. diff. 500 kPa (5 bar) with thermostat 30°C	T2	T2
X	X		ACCESSORIES		
			XX = no accessory available	XX	XX

FILTER ELEMENT FAMILY	E	P	A
SIZE & LENGTH			
SEALS			
FILTER MEDIA			

SPARE PARTS ELEMENTS

FILTER HOUSING	FILTER ELEMENT	CLOGGING INDICATOR
		
B P A 0 4 X X	E P A	

MDM
PRESSURE FILTERS

ORDERING AND OPTION CHART

M	D	M	COMPLETE FILTER FAMILY		
			SIZE & LENGTH	101	102
			FILTER MEDIA		
			FT = fibreglass 5 µm(c) β>1.000	FT	FT
			FC = fibreglass 7 µm(c) β>1.000	FC	FC
			FD = fibreglass 12 µm(c) β>1.000	FD	FD
			FS = fibreglass 16 µm(c) β>1.000	FS	FS
			FV = fibreglass 21 µm(c) β>1.000	FV	FV
			SEALS		
			1 = NBR Nitrile	1	1
			2 = FKM Fluoroelastomer	2	2
			BYPASS VALVE		
			S = without	S	S
			C = 600 kPa (6 bar)	C	C
			PORT TYPE		
			B = BSP thread	B	B
			N = NPT thread *	N	N
			S = SAE thread *	S	S
			PORT SIZE		
			3 = 1/2" (N3 not available)	3	3
			CLOGGING INDICATOR **		
			03 = port, plugged	03	03
			5E = visual differential 500 kPa (5 bar)	5E	5E
			6E = electrical differential 500 kPa (5 bar)	6E	6E
			7E = indicator 6E with LED	7E	7E
			T2 = elect. diff. 500 kPa (5 bar) with thermostat 30°C	T2	T2
X	X		ACCESSORIES		
			XX = no accessory available	XX	XX

	FILTER ELEMENT FAMILY	C	D	M
	SIZE & LENGTH			
	FILTER MEDIA			
	SEALS			

SPARE SEAL KIT


	NBR	FKM
FPA11 MDM101	521.0001.2	521.0062.2
FPA12 MDM102	521.0001.2	521.0062.2

* Not standard version, please check availability with our Customer Service

** When the filter is ordered with FKM seals, the first digit of the indicator code is a letter
(please see Clogging Indicator Chapter for further details)

FPA-MDM
PRESSURE FILTERS

INSTALLATION DRAWING

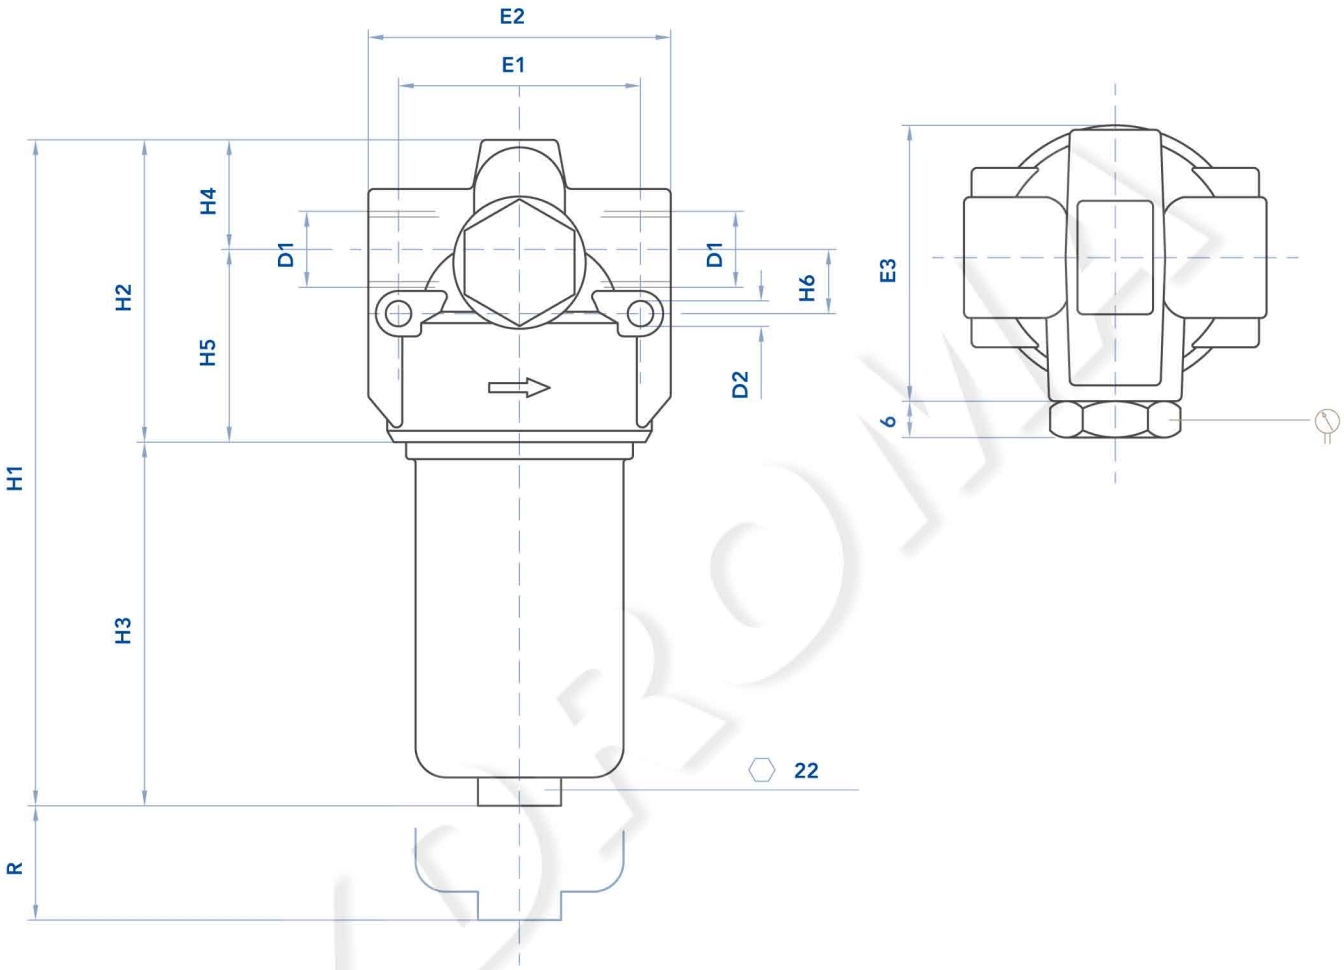


FILTER HOUSING

	D1	D2	H1	H2	H3	H4	H5	H6	E1	E2	E3	R	Kg
FPA11 MDM101	1/2"	6,5	157	78	79	28	50	17	64	76	75	60	0,65
FPA12 MDM102	1/2"	6,5	244	78	166	28	50	17	64	76	75	60	0,85



MAINTENANCE

The best time to change your filter element is just before it reaches its maximum dirt-holding capacity. For this reason, we recommend to monitor the pressure of the hydraulic oil flowing through the filter with a clogging indicator. When it is time to change the filter element, switch off the system before opening the filter housing and make sure there is no pressure in the filter. Unscrew the bowl and remove the dirty filter element. Replace it with an original UFI element, verifying the part number on the filter label or on the catalogue. Clean the bowl; check the gaskets conditions and replace if necessary. Insert the clean element into his seat, handling with care and cleanliness. Screw the housing until it stops, with a tightening torque of 50 Nm +5/0.
We recommend the stocking of a spare UFI filter element for timely replacement when required.
N.B. The used filter elements cannot be cleaned and are classified as "Dangerous waste material": they must be disposed according to the local laws by authorized Companies.

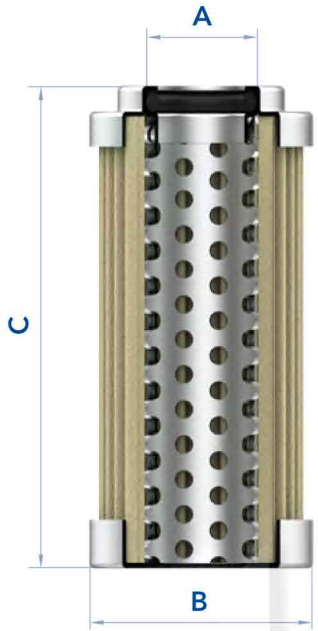



FILTER ELEMENT

	A	B	C	Kg	AREA (cm^2) Media F+
EPA11 CDM101	22	42	91	0,15	295
EPA12 CDM102	22	42	179	0,25	600

The used filter elements cannot be cleaned and are classified as "Dangerous waste material". They must be disposed according to local laws by authorized Companies.
Verify that the Company you choose has the expertise and authorization to dispose this type of waste material.




FPA-MDM
PRESSURE FILTERS


PRESSURE DROP CURVES (ΔP)

The "Assembly Pressure Drop (Δp)" is obtained by adding the pressure drop values of the Filter Housing and of the Clean Filter Element corresponding to the considered Flow Rate and it must be lower than 80 kPa (0,8 bar) and should never exceed 1/3 of the bypass valve setting.


BYPASS VALVE PRESSURE DROP
When selecting the filter size, these curves must be taken into account if it is foreseen that any flow peak is to be absorbed by the bypass valve, it also must be of proper configuration to avoid pressure peaks. The valve pressure drop is directly proportional to fluid specific gravity.


FILTER HOUSING PRESSURE DROP
(mainly depending on the port size)

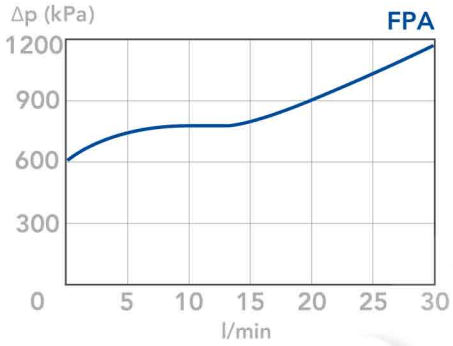

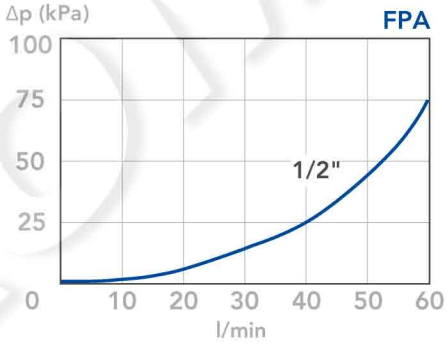

CLEAN FILTER ELEMENT PRESSURE DROP WITH F+ MEDIA
(depending both on the internal diameter of the element and on the filter media)

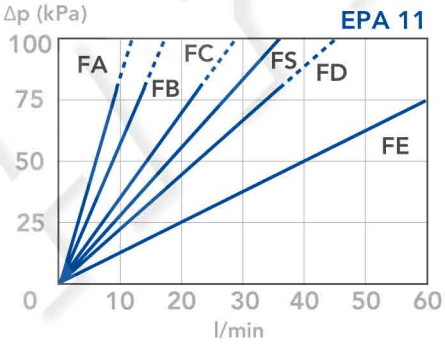

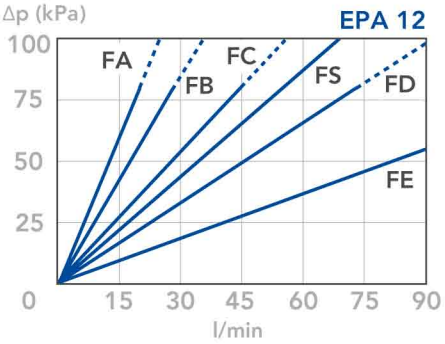

N.B.


All the curves have been obtained with mineral oil having a kinematic viscosity 30 cSt and specific gravity 0,86 Kg/dm3; for fluids with different features, please consider the factors described in the first part of this catalogue. All the curves are obtained from test done at the UFI HYDRAULIC DIVISION Laboratory, according to the specification ISO 3968. In case of discrepancy, please check the contamination level, viscosity and features of the fluid in use.



FORMULA UFI.WEB

DESCRIPTION

FormulaUFI.Web, that is used e.g. in the ZF Automatic Transmission Filter and in pressure line as last chance filter, provides protection to sensitive and critical components, e.g. in the Danfoss Hydraulic Integrated Circuit and in the Carraro specialty tractors as protection of the hydraulic power lift.
FormulaUFI.Web is based on stainless steel mesh having such characteristics of good strength, flexibility, wide range of fluids compatibility, high temperature resistance and extremely low pressure drop with high flow rates as required for suction applications.

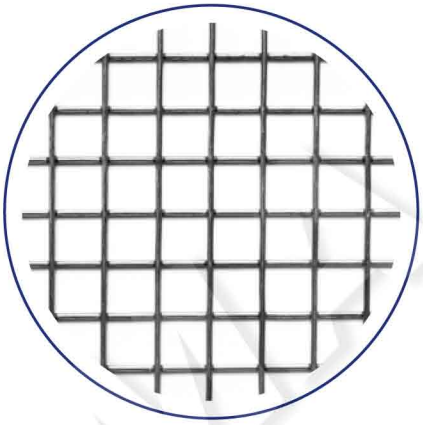

APPLICATIONS

AGRICULTURAL
CONSTRUCTION
HEAVY DUTY
INDUSTRIAL
MATERIAL HANDLING
POWER GENERATION

PLUS


+ **Very robust structure** and high level of heat, chemical, corrosion, abrasion and differential pressure resistance.
+ **Geometrical structure:** precise and uniform surface area.
+ **Multiple construction layout** for multiple filtration rate requests.

Main FormulaUFI.Web available options are highlighted in the following table. Additional customized options are available on request under technical evaluation of the specific application requirements.


FormulaUFI	FILTRATION RATING	UFI CODIFICATION	SOFIMA CODIFICATION
FormulaUFI.WEB	10 µm	MC	RD
FormulaUFI.WEB	30 µm	MD	MV-RT
FormulaUFI.WEB	60 µm	ME	MS
FormulaUFI.WEB	90 µm	MF	MN
FormulaUFI.WEB	150 µm	MQ	MC
FormulaUFI.WEB	250 µm	MG	DC
FormulaUFI.WEB	400 µm	SH	QC
FormulaUFI.WEB	500 µm	SK	CQ
FormulaUFI.WEB	600 µm	SL	SC
FormulaUFI.WEB	2000 µm	SR	DM
FormulaUFI.WEB - High collapse version	10 µm	TC	TD
FormulaUFI.WEB - High collapse version	25 µm	TD	TV
FormulaUFI.WEB - High collapse version	60 µm	TE	TS
FormulaUFI.WEB - High collapse version	90 µm	TF	TN

PRESSURE FILTERS
CLOGGING INDICATORS

INDICATOR SERIE		DESCRIPTION	FOR PRESSURE FILTERS SERIES
NBR	**FKM**	**Differential ELECTRICAL indicators with THERMOSTAT 30° C**	
T0	DB	Setting 130 kPa (1,3 bar)	FPH - FPO
T2	DE	Setting 500 kPa (5 bar)	FPA - FPB - FPD - FPL - FPM
T3	DF	Setting 800 kPa (8 bar)	FPA - FPB - FPC - FPD - FPL - FPM
T6	DD	Setting 250 kPa (2,5 bar)	FPA - FPB - FPC - FPD - FPG - FPL - FPM - FPO
		SPDT differential switch. C.C. 14 - 30 V: > max resistive or inductive load 4 - 3 A respectively C.A. 125-250 V: > max resistive or inductive load 1 A - Protection IP65 - Connector DIN 43650	

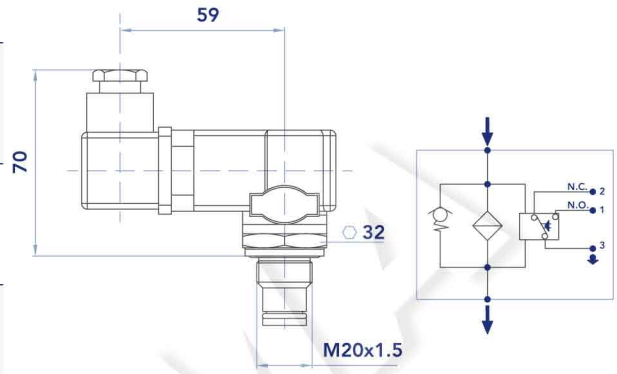

NBR	FKM	Differential VISUAL ELECTRICAL indicators	
70	E0	Setting 130 kPa (1,3 bar)	FPH
76	E6	Setting 250 kPa (2,5 bar)	FPA - FPB - FPD - FPL - FPM
72	E2	Setting 500 kPa (5 bar)	FPA - FPB - FPC - FPD - FPL - FPM
73	E3	Setting 800 kPa (8 bar)	FPA - FPB - FPC - FPD - FPL - FPM
		SPDT differential switch. C.C. 14 - 30 V: > max resistive or inductive load 4 - 3 A respectively C.A. 125-250 V: > max resistive or inductive load 1 A - Protection IP65 - Connector DIN 43650	

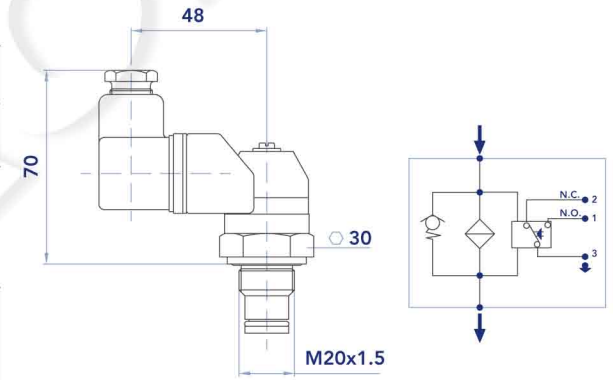

NBR	FKM	Differential ELECTRICAL indicators VANDAL PROOF	
M2	-	Setting 500 kPa (5 bar)	FPA - FPB - FPC - FPD - FPL - FPM
M3	-	Setting 800 kPa (8 bar)	FPA - FPB - FPC - FPD - FPL - FPM
M6	-	Setting 250 kPa (2,5 bar)	" FPA - FPB - FPD - FPL - FPM "
		SPDT differential switch. C.C. 14 - 30 V: > max resistive or inductive load 4 - 3 A respectively C.A. 125-250 V: > max resistive or inductive load 1 A - Protection IP65 - Connector DIN 43650	

