
09801


COIL - TUBE ∅ 19 — 24 W

- Wire insulation class. . . . . H (>185°C)
- ED. 100%
- Coil power at 20° C. . . . . 24 W
- Ambient temperature . . . . . -20 +40° C
- Weight. . . . . 0,28 Kg


ELECTRIC CIRCUITS




STANDARD




WITH DIODE (BI-DIRECTIONAL)

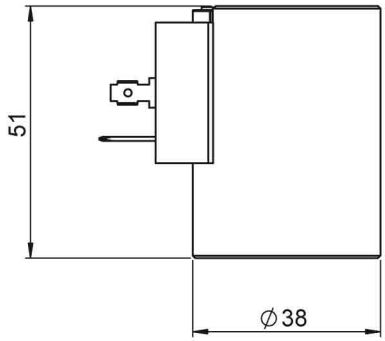


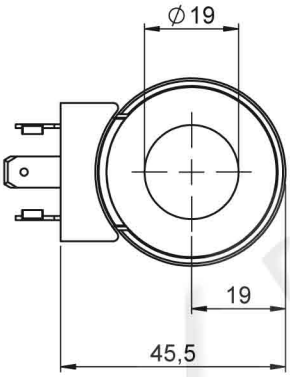

AMP - JUNIOR

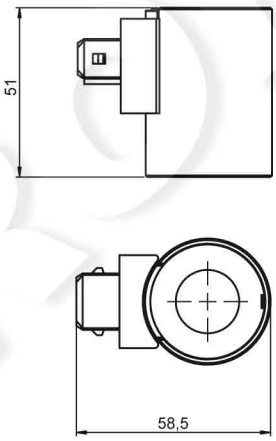

DEUTSCH DT4

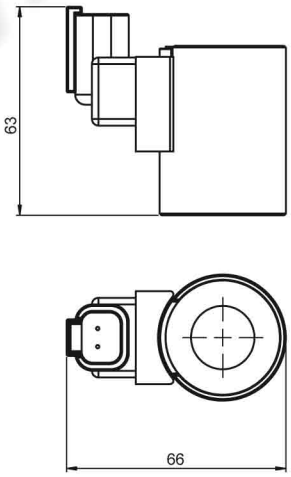

CONNECTOR	PROTECTION CLASS	COIL THERMAL INSULATION CLASS	VOLTAGE [V]	RESISTANCE [Ω]	CIRCUIT	ORDERING CODE
DIN 43650	IP65*	H	12 V dc	6,8	STANDARD	**098011190**
DIN 43650	IP65*	H	24 V dc	24	STANDARD	**098012190**
DIN 43650	IP65*	H	26 V dc	27,1	STANDARD	**098012191**
DIN 43650	IP65*	H	220 V Rac**	1470	STANDARD	**098016190**
DEUTSCH DT 4	IP67	F	12 V dc	6,8	WITH DIODE	**098111190**
DEUTSCH DT 4	IP67	F	24 V dc	24	WITH DIODE	**098112190**
AMP - JUNIOR	IP65*	F	12 V dc	6,8	WITH DIODE	**098211190**
AMP - JUNIOR	IP65*	F	24 V dc	24	WITH DIODE	**098212190**
AMP - JUNIOR	IP65*	H	26 V dc	28,1	WITH DIODE	**098212193**

*** Protection index with standard connector**

**** Rectifier not included - Power 25W**